




**VALUE PRICED PROXIMITY CARD READER**

HID's MaxiProx<sup>®</sup> Reader is ideal for installations incorporating parking control and long read range applications. The MaxiProx reader packages all the electronics in one rugged, attractive and easy-to-install housing.

- Features a beeper and multicolor LED which can be host-and/or locally controlled.
- Long read range distance (up to 6' with ProxPass<sup>®</sup>).
- Autotune allows read range to be maintained within four inches of metal.
- Wiegand, Clock-and-Data and selectable serial outputs available.
- "Parking hold" feature allows connection to a loop detector to ensure accurate detection of vehicles in parking lanes.
- Compatible with all HID cards and tags with formats up to 85 bits.
- Multicolor LED with internal or host control of the LED and beeper.
- Two MaxiProx units can operate one meter apart for "HI-LO" (truck and car) installations.
- Reader supervision signal for CASI-RUSCO<sup>®</sup> panels.

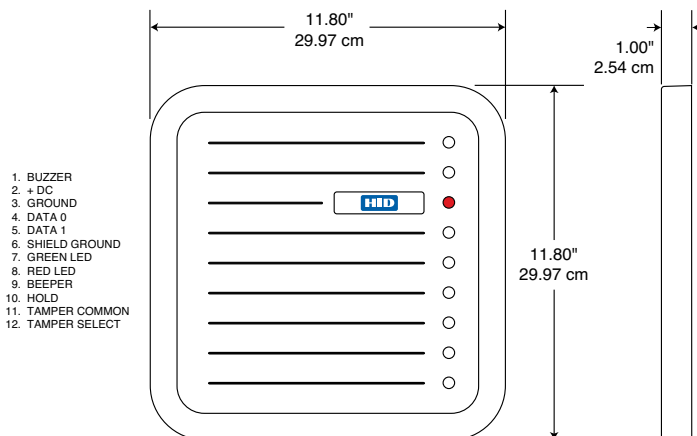

## FEATURES:

- **Security** – Includes a tamper switch to provide electronic notification of reader tampering. Recognizes card formats up to 85 bits.
- **Audiovisual Indication** – When a proximity card is presented to the reader, the red LED flashes green and the beeper sounds. The multicolor LED and beeper can also be controlled individually by the host system.
- **Diagnostics** – On reader power-up, an internal self-test routine checks and verifies the setup configuration, determines the internal or external control of the LED and beeper, and initializes reader operation. An additional external loop-back test allows for the reader outputs and inputs to be verified without the use of additional test equipment.
- **Indoor/outdoor Design** – Sealed in a rugged, weatherized polycarbonate enclosure designed to withstand harsh environments as well as provide a high degree of vandal resistance for reliable performance anywhere.
- **Easily Interfaced** - Interfaces with all existing Wiegand, Clock-and-Data, RS-232, RS-422 and RS-485 protocol access control systems. The serial interfaces support baud rates of 1200, 2400, 4800, and 9600 baud
- **Options** - LED and beeper operation; custom label



## SPECIFICATIONS

<b>*Model Name</b>	<b>MaxiProx*</b>
<b>Model Number</b>	5375
<b>**Read Range</b>	ProxCard® II card - up to 24" (60.9 cm) ISOProx® II card - up to 20" (50.8 cm) DuoProx® II Card - up to 20" (50.8 cm) Smart ISOProx® II - up to 20" (50.8 cm) Smart DuoProx® II Card - up to 20" (50.8 cm) HID Proximity & MIFARE® Card - up to 20" (50.8 cm) ProxCard® Plus card - up to 13" (33 cm) ProxKey® II key fob - up to 17" (43.2 cm) MicroProx® Tag - up to 15" (38 cm) ProxPass® Active Vehicle Tag - up to 6' (1.8 m)
<b>Mounting</b>	Mount on non-metallic surfaces for optimal read range performance.
<b>Color</b>	Gray
<b>Keypad</b>	No
<b>Dimensions</b>	11.8" x 11.8" x 1.0" (30.0 x 30.0 x 2.54 cm)
<b>Power Supply</b>	Configurable 12 or 24 VDC
<b>Power Requirements (Standard Power)</b>	DC Current at 12V: Avg. 200mA, Peak 700mA DC Current at 24V: Avg. 260mA, Peak 1.2A
<b>Operating Temperature</b>	-22° to 150° F (-30° to 65° C)
<b>Operating Humidity</b>	0-95% relative humidity noncondensing
<b>Transmit Frequency</b>	125 kHz
<b>Environmental</b>	IP55
<b>Cable Distance</b>	Wiegand interface: 500 feet (152 m) Clock-and-data interface: 50 feet (15 m) RS-232: 50-200 feet (15-61 m) Recommended cable is ALPHA 1295 (22 AWG) 5 conductor minimum stranded with overall shield or equivalent. Additional conductors may be required for LED or beeper control. RS-422 and RS-485: 4000 feet (1219 m) Recommended cable is ALPHA 1297.
<b>Certifications</b>	UL294/cUL (US), FCC Certification (US), IC (Canada), CE (EU), C-tick (Australia, New Zealand), SRRC (China), MIC (Korea), NCC (Taiwan), MIC (Japan), iDA (Singapore), RoHS
<b>Housing Material</b>	UL94 Polycarbonate
<b>Warranty</b>	Lifetime

\*Consult How to Order Guide for specific ordering instructions.

\*\*Dependent upon installation conditions

North America: +1 949 732 2000  
Toll Free: 1 800 237 7769  
Europe, Middle East, Africa: +44 1440 714 850  
Asia Pacific: +852 3160 9800  
Latin America: +52 55 5081 1650

## ASSA ABLOY

An ASSA ABLOY Group brand